


# ANGLED LUMINAIRE STOFFEL

## TECHNICAL DATA SHEET

26W LED, 3020 Lumen, 116 Lumen/Watt, 3000 Kelvin. L=1200mm, IP20, CRI>80. Profile bracket variant left with LED light insert. Suitable for wall or ceiling mounting. Profile bracket L=1200mm made of welded aluminium. Lacquered in IGP Brown STYLE 26. 45° luminaire insert (oblique illumination) with LED boards, control gear, connection terminal incl. acrylic glass diffuser opal matt. Consoles for mounting on wall or ceiling.

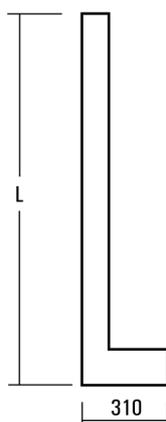

CE IP20

### PRODUCT DATA

Item number	S48819VL-24-L3
Dimensions	L=1200 mm
Light source	LED
Equipping	24 W
System output	26 W
Ballast	
Assembly distance	
Weight	

### LIGHT DATA

Optical light output ratio	
Light direct/non direct ratio	
Absolute luminous flux	3200 lm
Basis: Light source 840	
Luminaire light output	116 lm/W

### UNIFIED GLARE RATING UGR

X=4H, Y=8H, S=0,25H  
 Deg. of reflection  
 Perpendicular Zero  
 Perpendicular Ninty