


LIGHT

tulux




SWISS LIGHT CREATIONS

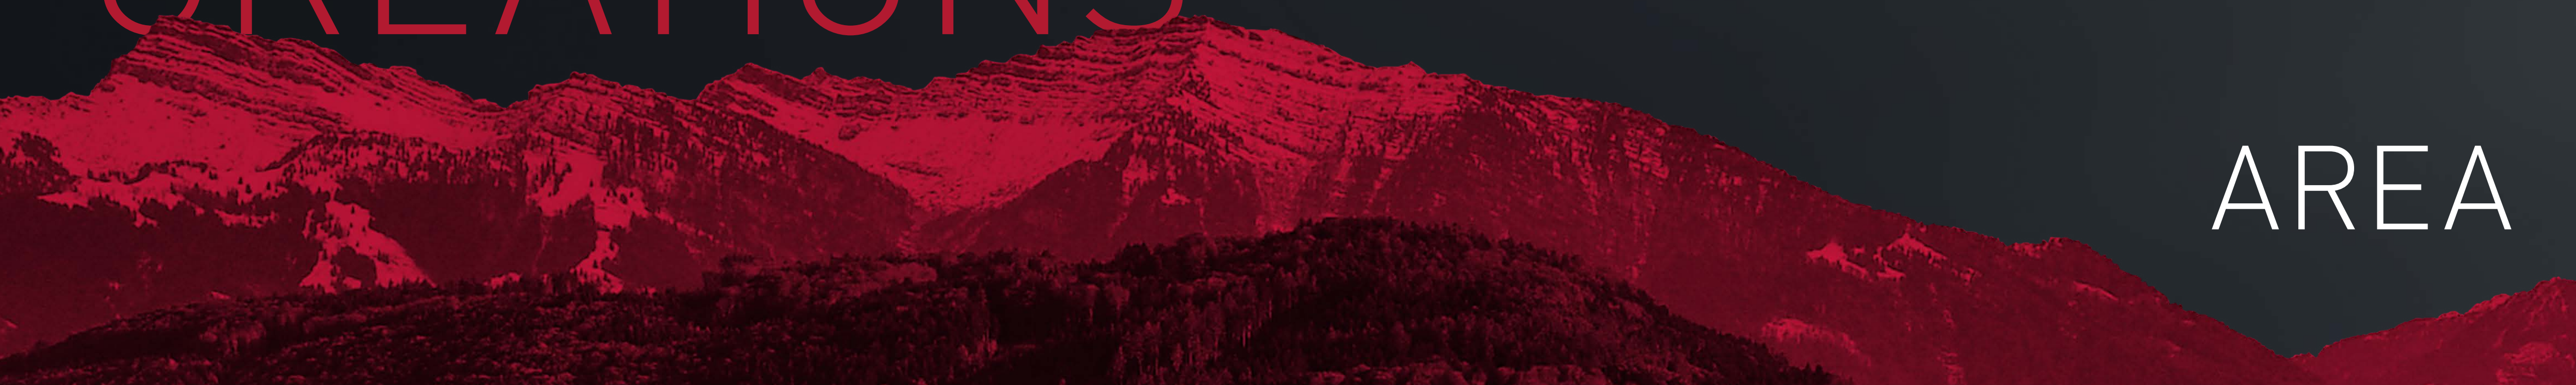


AREA

AREA

OVERVIEW

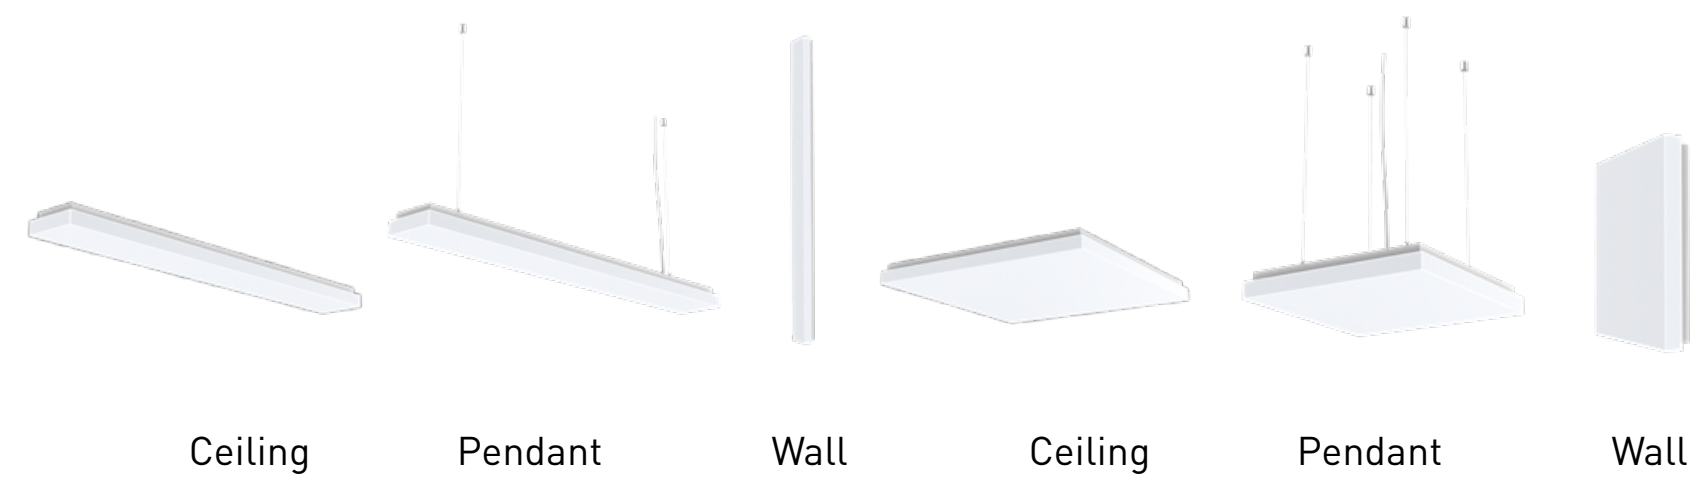

	Ceiling	Pendant	Wall	Ceiling	Pendant	Wall
Light colour						
3000 K / CRI > 90	•	•	•	•	•	•
4000 K / CRI > 90	•	•	•	•	•	•
Light output						
Low	•	•	•	•	•	•
Medium	•	•	•	•	•	•
Cover						
Opal	•	•	•	•	•	•
Prismatic	•	•	•	•	•	•
Dimensions						
140 × 1157 × 59 mm	•	•	•			
140 × 1457 × 59 mm	•	•	•			
420 × 420 × 59 mm				•	•	•
650 × 650 × 59 mm				•	•	•
Option						
DALI-2	•	•	•	•	•	•
Emergency operation	•	•	•	•	•	•
DALI-2 and emergency operation	•	•	•	•	•	•
Mounted on TURBO and SET lighting band	•					



← Scan the QR code now and discover all the highlights of the product family AREA online!

Further technical specifications:

- Unified Glare Rating: up to UGR < 19
- Luminous flux (effective): 2797 up to 10772 lm/m
- System efficiency: up to 145 lm/W
- Shock resistance: IK07 (opal cover) / IK05 (prismatic cover)
- IP class: IP40/IP50 in the lamp housing

AREA – five convincing reasons.

1. Subtle design
2. Versatile combination options
3. Simple, flexible installation
4. Sustainable in terms of efficiency and construction
5. Can be customised on request











TULUX AG
TÖDISTRASSE 4
CH-8856 TUGGEN
T +41 55 465 60 00
F +41 55 465 60 01
INFO@TULUX.CH

WWW.TULUX.CH



SLG 
member