

LIGHT

tulux

SWISS
LIGHT
CREATIONS



ZEN

LED LIGHT BAND ZEN

OVERVIEW



Cover	Ceiling / Pendant	Ceiling / Pendant / Wall	Ceiling / Pendant	Concrete ceiling	Hollow ceiling	Hollow ceiling with trim	Wall	Pendant indirect	Wall indirect
Satin-finished acrylic glass	•			•	•	•	•	•	•
Prismatic acrylic glass	•		•	•	•	•		•	
Light colour									
3000 K / CRI > 90	•	•	•	•	•	•	•	•	•
4000 K / CRI > 90	•	•	•	•	•	•	•	•	•
Unified Glare Rating									
UGR < 16								•	
UGR < 19			•	•	•	•		•	
UGR < 22	•			•	•	•		•	•
UGR < 25	•	•		•	•	•	•	•	•
Light output									
Low	•	•	•	•	•	•	•	•	•
Medium	•	•		•	•	•	•	•	•
Beam pattern									
Direct	•	•	•	•	•	•	•		
Direct/indirect								•	•
Option									
DALI-2	•	•	•	•	•	•	•	•	•
Emergency operation ¹	•	•	•	•	•	•	•	•	•
DALI-2 and emergency operation ¹	•	•	•	•	•	•	•	•	•

¹With single battery supply 1 h, possible from a minimum length of 1125 mm.

Further technical specifications:

- Luminous flux effective: up to 4612 lm/m
- System efficiency: up to 120 lm/W
- Shock resistance: IK06 (satin-finished cover) / IK07 (prismatic cover)

CUSTOMISATION


- Colour temperature: 2,700 K, 6,500 K and Tunable White 2,700–6,500 K
- Higher luminous flux
- Integrated sensors
- RAL/NCS paint finishes



REFLECTOR LUMINAIRES ON REQUEST

Made up of multicellular reflectors. With universal mounting springs for ZEN profile.


- Colour temperature: 3,000 K, 4,000 K
- Colour rendering: CRI > 80 and > 90
- Reflector: silver-coated and matt anodised
- Beam pattern: direct and asymmetric



← Scan the QR code now
and discover all the highlights of
the product family ZEN online!

ZEN – five convincing reasons.

1. Superb light quality
2. Millimetre-precise planning
3. Homogeneous illumination
4. Clean-lined, timeless design
5. Boundless application with < 16

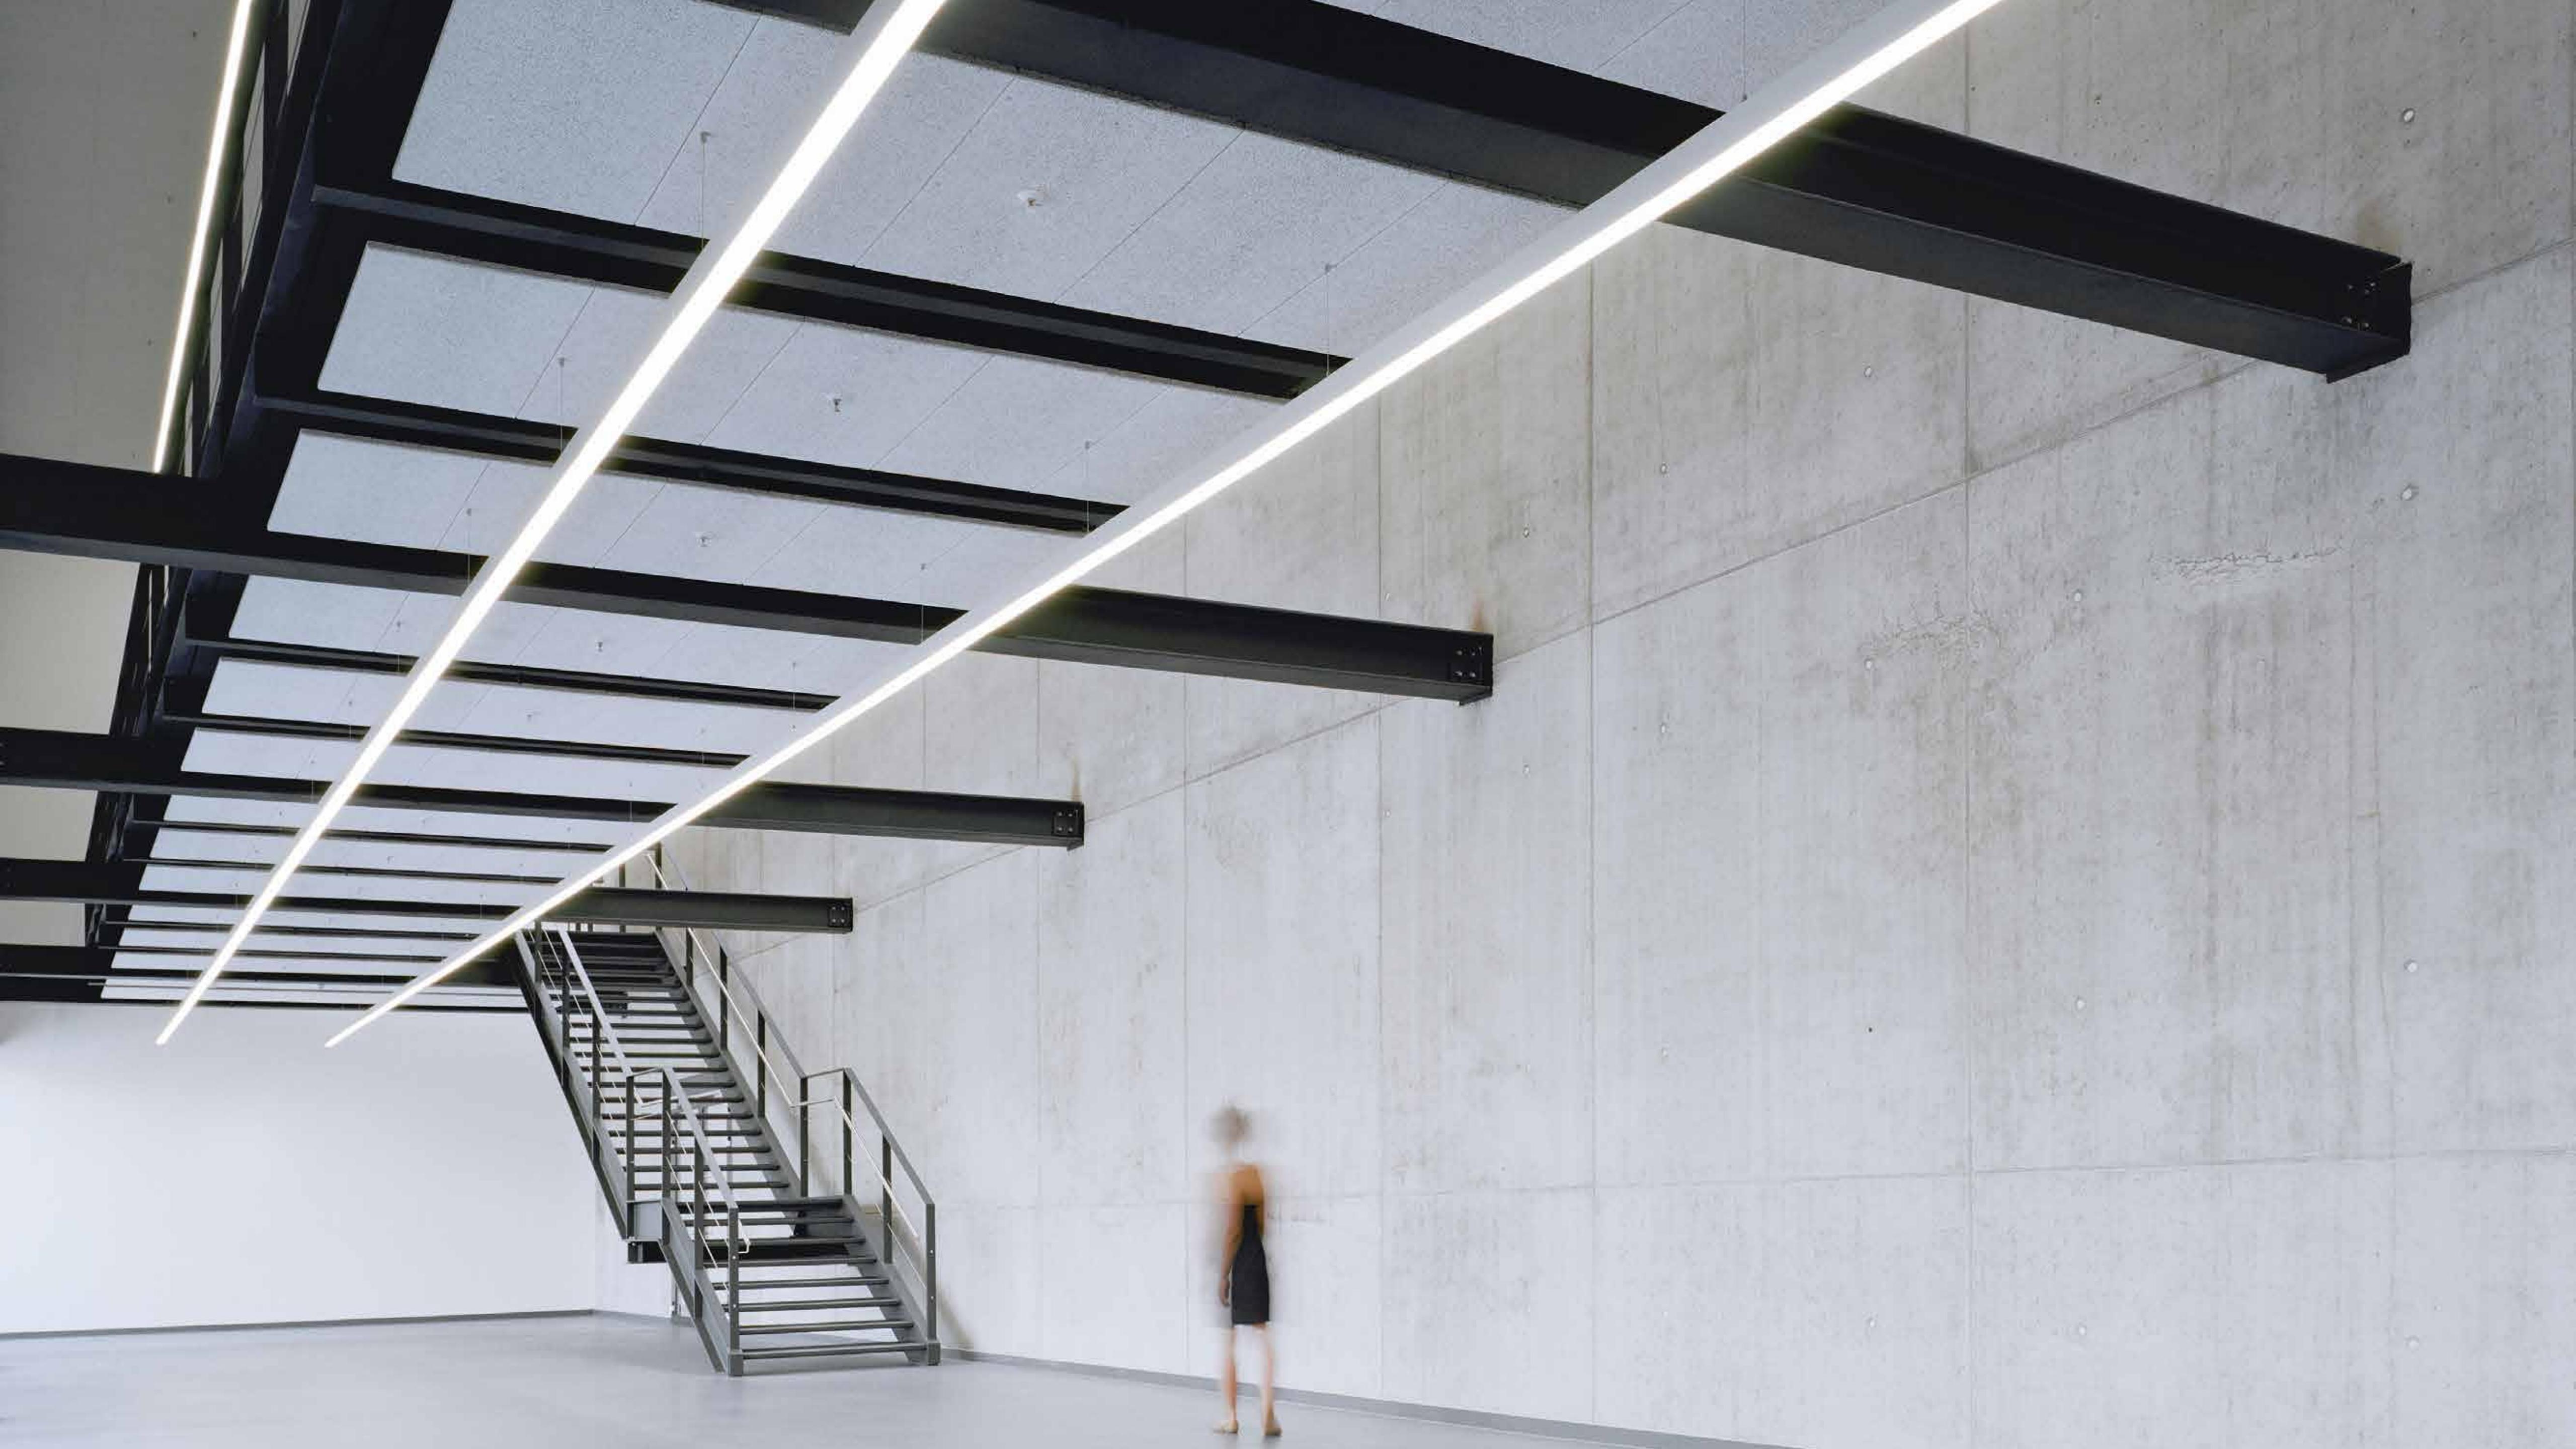

TULUX AG
TÖDISTRASSE 4
CH-8856 TUGGEN
T +41 55 465 60 00
F +41 55 465 60 01
INFO@TULUX.CH

WWW.TULUX.CH



09/22