

LIGHT

tulux

SWISS LIGHT CREATIONS




SPIN 2



SPIN 2

OVERVIEW

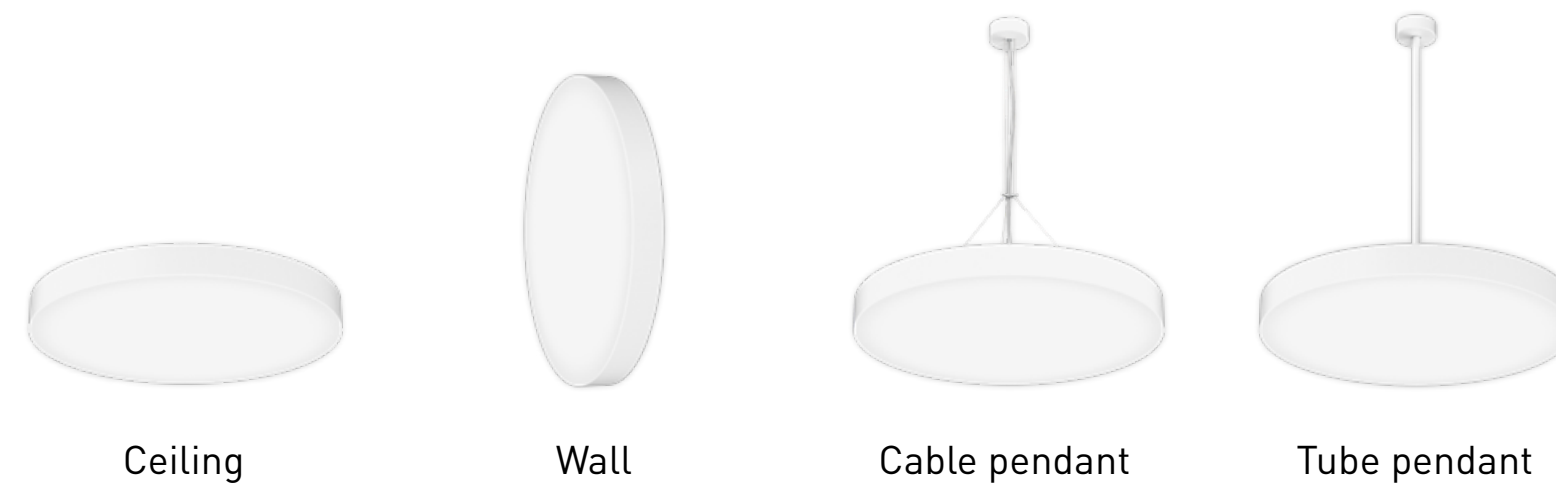

	Ceiling	Wall	Cable pendant	Tube pendant
Light colour				
3000 K / CRI > 90	•	•	•	•
4000 K / CRI > 90	•	•	•	•
Light output				
Very low ¹	•	•		
Low	•	•	•	•
Medium	•	•	•	•
Cover				
Opal	•	•	•	•
Prismatic ²	•		•	•
Beam pattern				
Direct	•	•		
Direct/indirect			•	•
Dimensions				
Ø 400 mm, cover height 60 mm	•	•	•	•
Ø 600 mm, cover height 60 mm	•	•	•	•
Ø 900 mm, cover height 60 mm	•	•	•	•
Option				
DALI-2	•	•	•	•
Emergency operation	•	•	•	•
DALI-2 and emergency operation	•	•	•	•


¹Applies to ceiling- and wall-mounted luminaire, opal Ø 400 mm.

²Except ceiling-mounted and pendant luminaire, Ø 900 mm.



Further technical specifications:


- Unified Glare Rating:
up to UGR < 19 for prismatic cover, low light output
up to UGR < 22 for prismatic cover, medium light output
up to UGR < 22 for opal cover, low light output
up to UGR < 25 for opal cover, medium light output
- Effective luminous flux: 1 477 to 15 000 lm
- System efficiency: up to 138 lm/W
- Shock resistance: IK06 (opal cover) / IK05 (prismatic cover)
- IP class:
ceiling/wall-mounted luminaire IP40/IP50 in the lamp housing,
pendant luminaire IP40

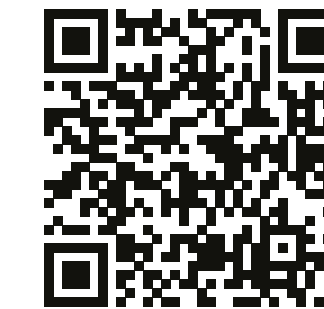

← Scan the QR code now
and discover all the highlights of
the product family SPIN 2 online!

SPIN 2 – five convincing reasons.

1. Integrated indoor luminaire
2. Limitless customisation options
3. Perfect illumination
4. Floating, timeless elegance
5. Long-term availability

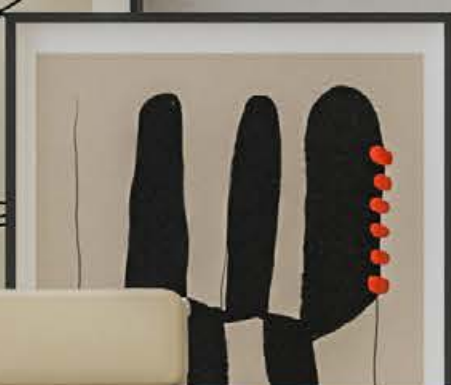









TULUX AG
TÖDISTRASSE 4
CH-8856 TUGGEN
T +41 55 465 60 00
F +41 55 465 60 01
INFO@TULUX.CH

WWW.TULUX.CH



SLG 
member