
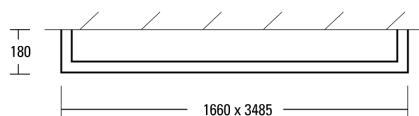


CEILING-MOUNTED LUMINAIRE STOFFEL, TRIPLE

TECHNICAL DATA SHEET

168W (6x28W), 18878 lumen, 3000 Kelvin, CRI>80, IP20. 3-piece luminaire construction made of aluminum suitable for ceiling mounting. Dimensions single: 1660x745x180mm (LxWxH). Each element consists of two U-shaped elements incl. LED insert with control gear incl. acrylic glass diffuser opal matt and one connecting console. Additionally, two separate connection profiles. Dimensions triple: 1660x3485x180mm (LxWxH). Profile elements, connection consoles and connection profiles lacquered in IGP-DURA xal 4201 4201E82291A3F IGP Brown STYLE 26 smooth structure, pearl effects, deep matt.

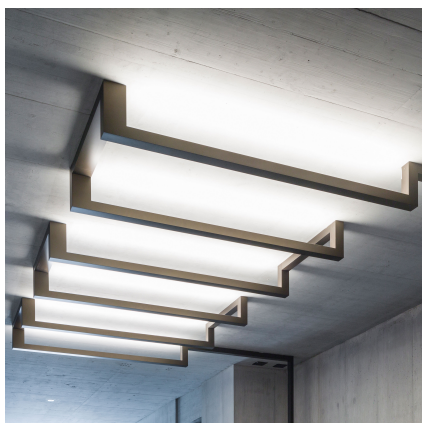

CE IP20

PRODUCT DATA

Item number	S51331-168-L3
Dimensions	L=1660 mm / B=3485 mm / H=180
Light source	LED
Equipping	150 W
System output	168 W
Ballast	
Assembly distance	
Weight	

LIGHT DATA

Optical light output ratio	
Light direct/non direct ratio	
Absolute luminous flux	18878 lm
Basis: Light source 840	
Luminaire light output	112 lm/W

UNIFIED GLARE RATING UGR

X=4H, Y=8H, S=0,25H
Deg. of reflection
Perpendicular Zero
Perpendicular Ninety