

LIGHT

tulux


# SWISS LIGHT CREATIONS



SPIN 2

# SPIN 2

## OVERVIEW

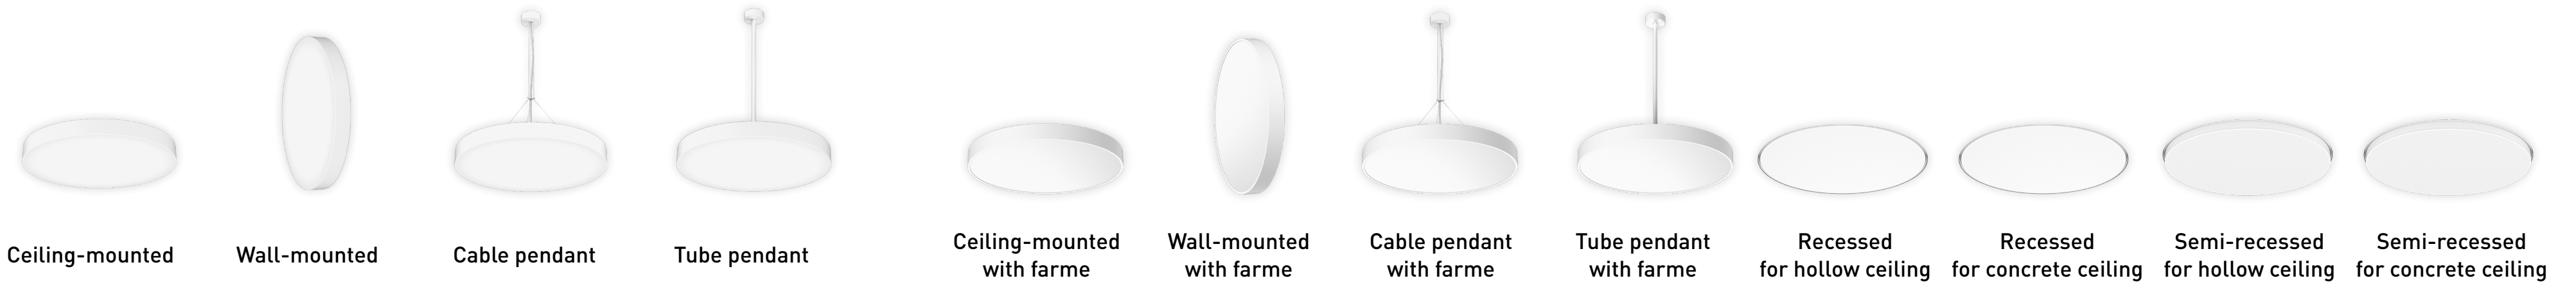

	Ceiling-mounted	Wall-mounted	Cable pendant	Tube pendant	Ceiling-mounted with frame	Wall-mounted with frame	Cable pendant with frame	Tube pendant with frame	Recessed for hollow ceiling	Recessed for concrete ceiling	Semi-recessed for hollow ceiling	Semi-recessed for concrete ceiling
<b>Light colour</b>												
3000 K / CRI > 90	•	•	•	•	•	•	•	•	•	•	•	•
4000 K / CRI > 90	•	•	•	•	•	•	•	•	•	•	•	•
<b>Light output</b>												
Very low <sup>1</sup>	•	•										
Low	•	•	•	•	•	•	•	•	•	•	•	•
Medium	•	•	•	•	•	•	•	•	•	•	•	•
<b>Cover</b>												
Opal	•	•	•	•	•	•	•	•	•	•	•	•
Prismatic <sup>2</sup>	•		•	•	•		•	•	•	•	•	•
<b>Beam pattern</b>												
Direct					•	•	•	•	•	•	•	•
Direct/passively indirect	•	•	•	•	•	•						
Direct/actively indirect			•	•			•	•				
<b>Dimensions</b>												
Ø 300 mm	•	•			•	•						
Ø 400 mm	•	•	•	•	•	•	•	•	•	•	•	•
Ø 600 mm	•	•	•	•	•	•	•	•	•	•	•	•
Ø 900 mm	•	•	•	•	•	•	•	•	•	•	•	•
Cover/frame height 60 mm	•	•	•	•	•	•	•	•				
<b>Option</b>												
DALI-2	•	•	•	•	•	•	•	•	•	•	•	•
Emergency operation	•	•	•	•	•	•	•	•	•	•	•	•
DALI-2 and emergency operation	•	•	•	•	•	•	•	•	•	•	•	•

<sup>1</sup>Applies to ceiling- and wall-mounted luminaire, opal, Ø 400 mm.

<sup>2</sup>Except Ø 900 mm ceiling-mounted and pendant luminaire without frame as well recessed and semi-recessed luminaire.


**Further technical specifications:**

- Unified Glare Rating: from UGR < 16 to UGR < 25
- Effective luminous flux: 1175 to 15 190 lm
- System efficiency: up to 161 lm/W

- Shock resistance: IK06 (opal cover) / IK05 (prismatic cover)
- IP class: ceiling/wall-mounted luminaire IP20 / IP50 in the lamp housing, pendant luminaire IP20 / IP40 in the lamp housing

SPIN 2 – five convincing reasons.

1. Integrated indoor luminaire
2. Limitless customisation options
3. Perfect illumination
4. Floating, timeless elegance
5. Long-term availability



← Scan the QR code now and discover all the highlights of the product family SPIN 2 online!











TULUX AG  
TÖDISTRASSE 4  
CH-8856 TUGGEN  
T +41 55 465 60 00  
F +41 55 465 60 01  
INFO@TULUX.CH

WWW.TULUX.CH



**SLG**   
member