

LIGHT

tulux


# SWISS LIGHT CREATIONS

AREA



# AREA

## OVERVIEW

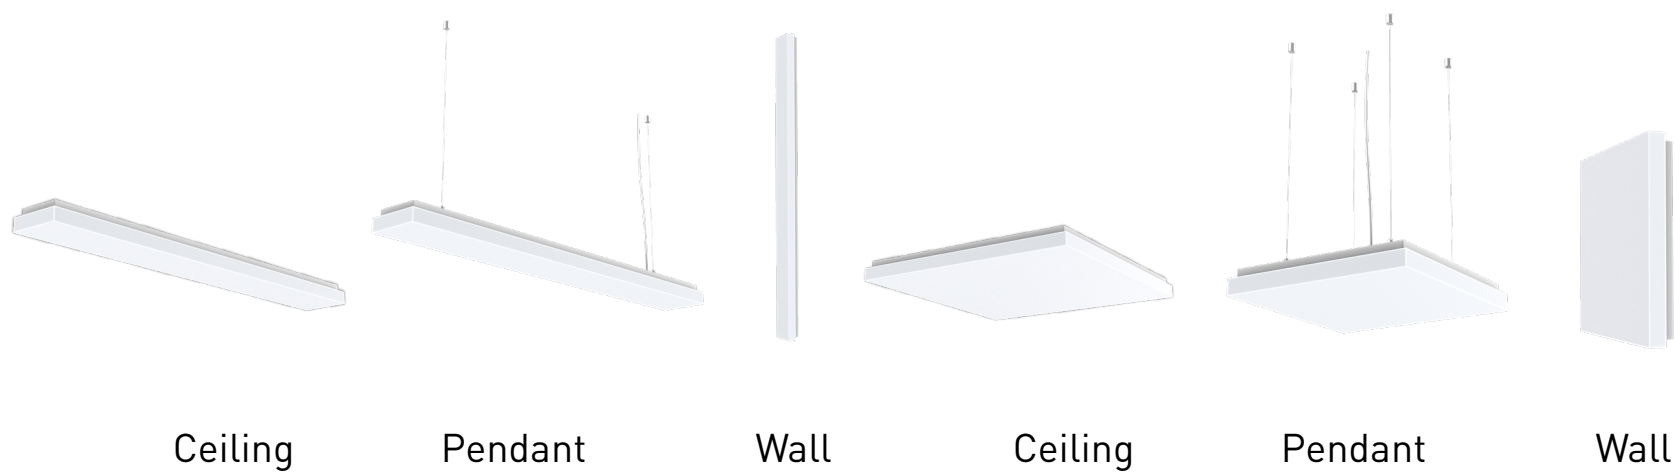

|                                        | Ceiling | Pendant | Wall | Ceiling | Pendant | Wall |
|----------------------------------------|---------|---------|------|---------|---------|------|
| Light colour                           |         |         |      |         |         |      |
| 3000 K / CRI > 90                      | •       | •       | •    | •       | •       | •    |
| 4000 K / CRI > 90                      | •       | •       | •    | •       | •       | •    |
| Light output                           |         |         |      |         |         |      |
| Low                                    | •       | •       | •    | •       | •       | •    |
| Medium                                 | •       | •       | •    | •       | •       | •    |
| Cover                                  |         |         |      |         |         |      |
| Opal                                   | •       | •       | •    | •       | •       | •    |
| Prismatic                              | •       | •       | •    | •       | •       | •    |
| Prismatic PRO                          | •       | •       | •    |         |         |      |
| Dimensions                             |         |         |      |         |         |      |
| 140/155 × 1157 × 59/65 mm              | •       | •       | •    |         |         |      |
| 140/155 × 1457 × 59/65 mm              | •       | •       | •    |         |         |      |
| 420 × 420 × 59 mm                      |         |         |      | •       | •       | •    |
| 650 × 650 × 59 mm                      |         |         |      | •       | •       | •    |
| Option                                 |         |         |      |         |         |      |
| DALI-2                                 | •       | •       | •    | •       | •       | •    |
| Emergency operation                    | •       | •       | •    | •       | •       | •    |
| DALI-2 and emergency operation         | •       | •       | •    | •       | •       | •    |
| Mounted on TURBO and SET lighting band |         |         |      |         |         |      |
|                                        | •       |         |      |         |         |      |



← Scan the QR code now  
and discover all the highlights  
of the product family AREA online!

### AREA – five convincing reasons.

1. Subtle design
2. Versatile combination options
3. Simple, flexible installation
4. Sustainable in terms of efficiency and construction
5. Can be customised on request

#### Further technical specifications:

- Unified Glare Rating: up to UGR < 16
- Luminous flux (effective): 2797 up to 10772 lm/m
- System efficiency: up to 145 lm/W
- Shock resistance: IK07 (opal cover) / IK05 (prismatic cover)
- IP class: IP40/IP50 in the lamp housing























TULUX AG  
TÖDISTRASSE 4  
CH-8856 TUGGEN  
T +41 55 465 60 00  
F +41 55 465 60 01  
INFO@TULUX.CH

WWW.TULUX.CH



**SLG**   
member