



LIGHT



SWISS LIGHT CREATIONS

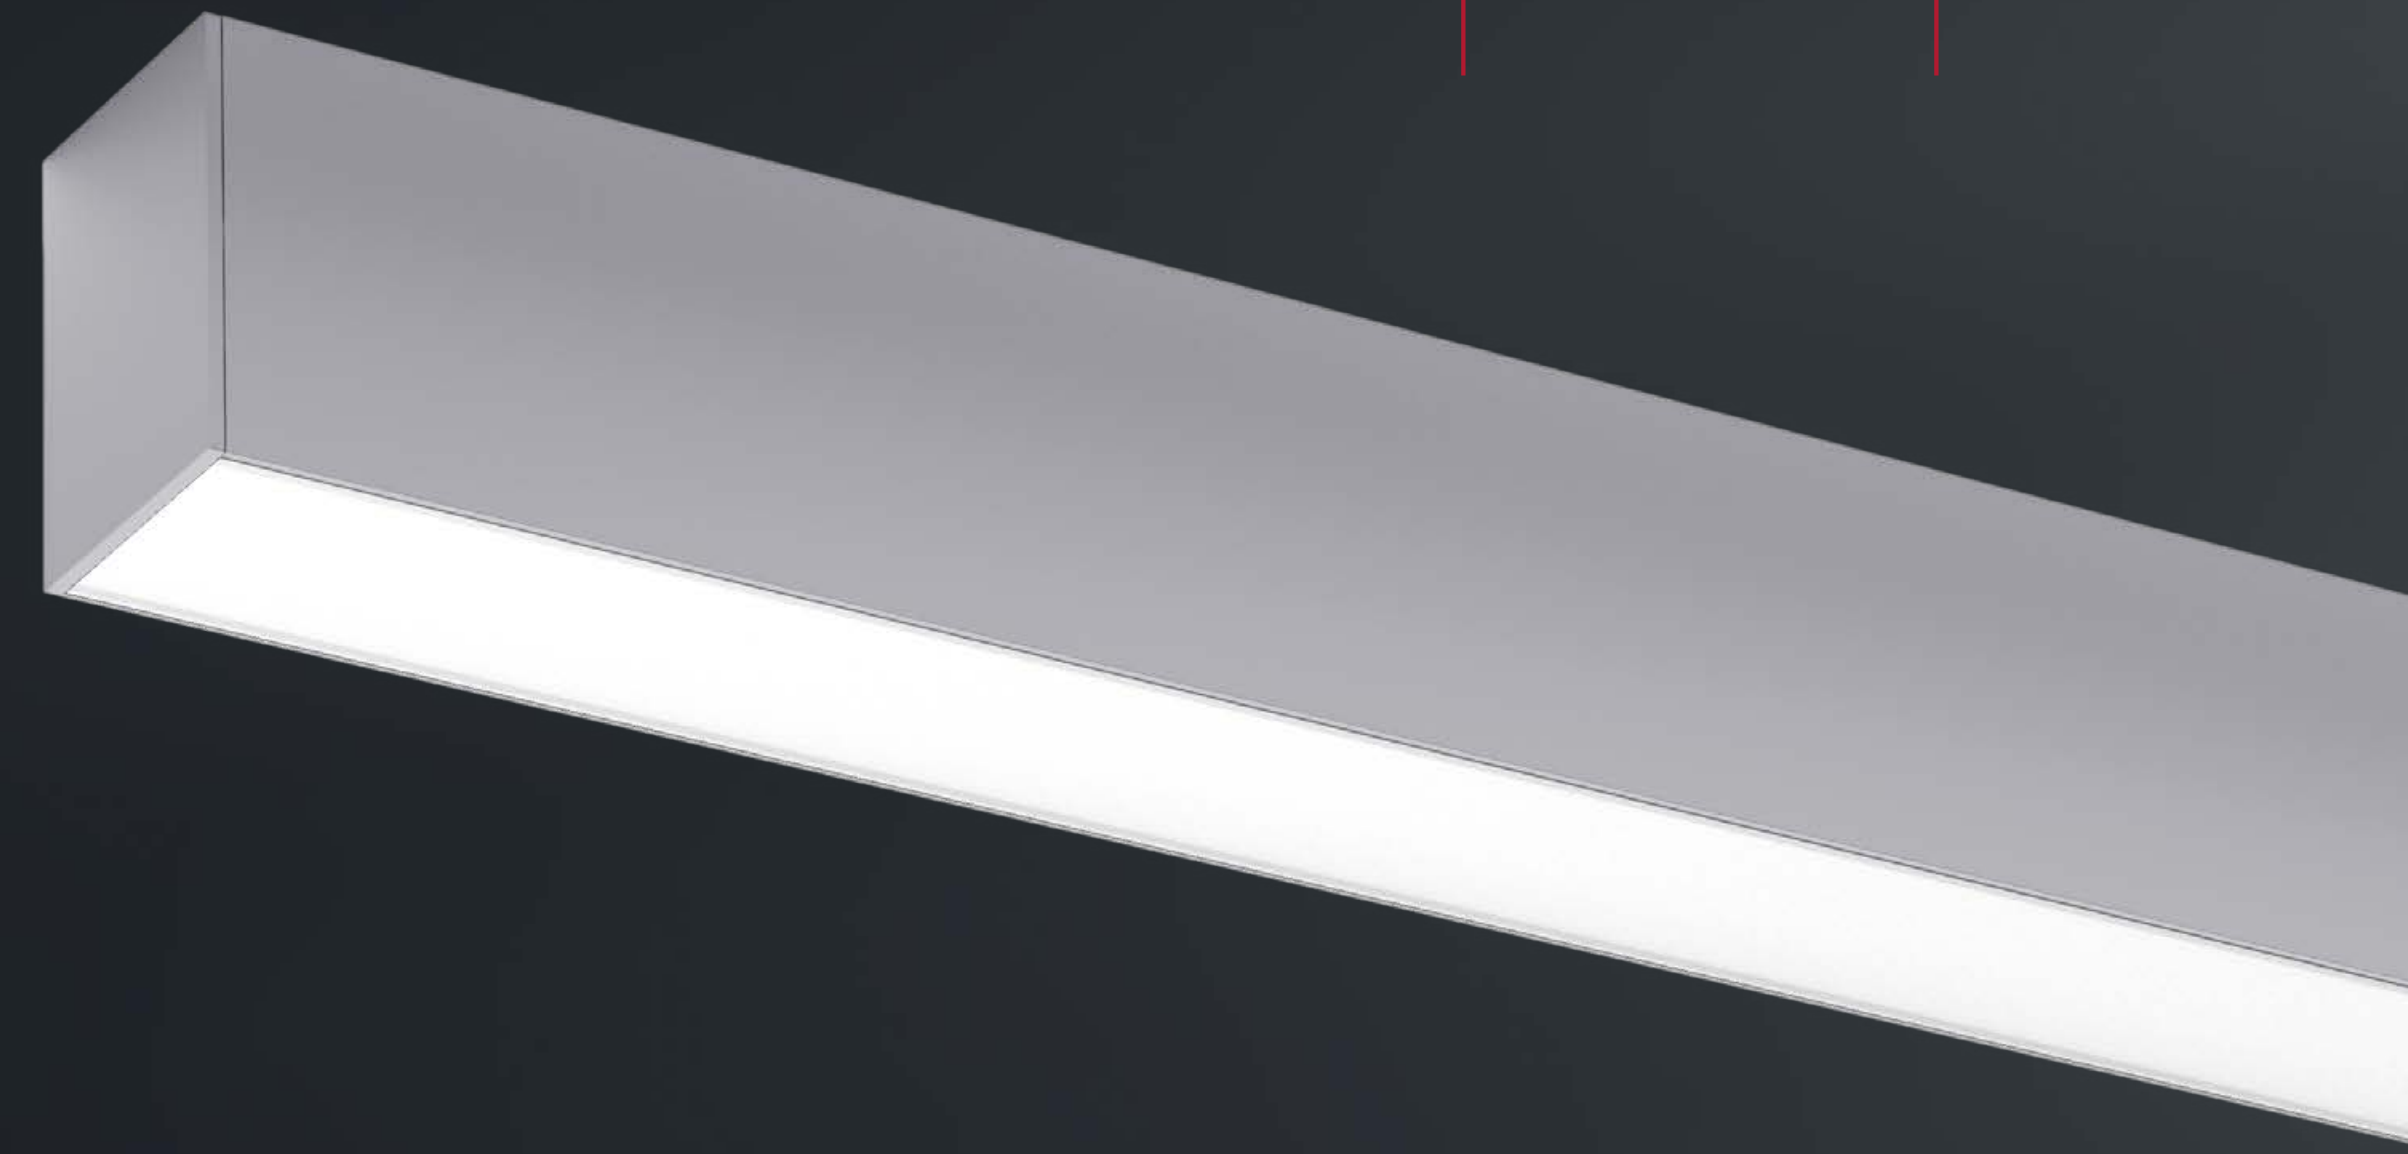


ZEN XS

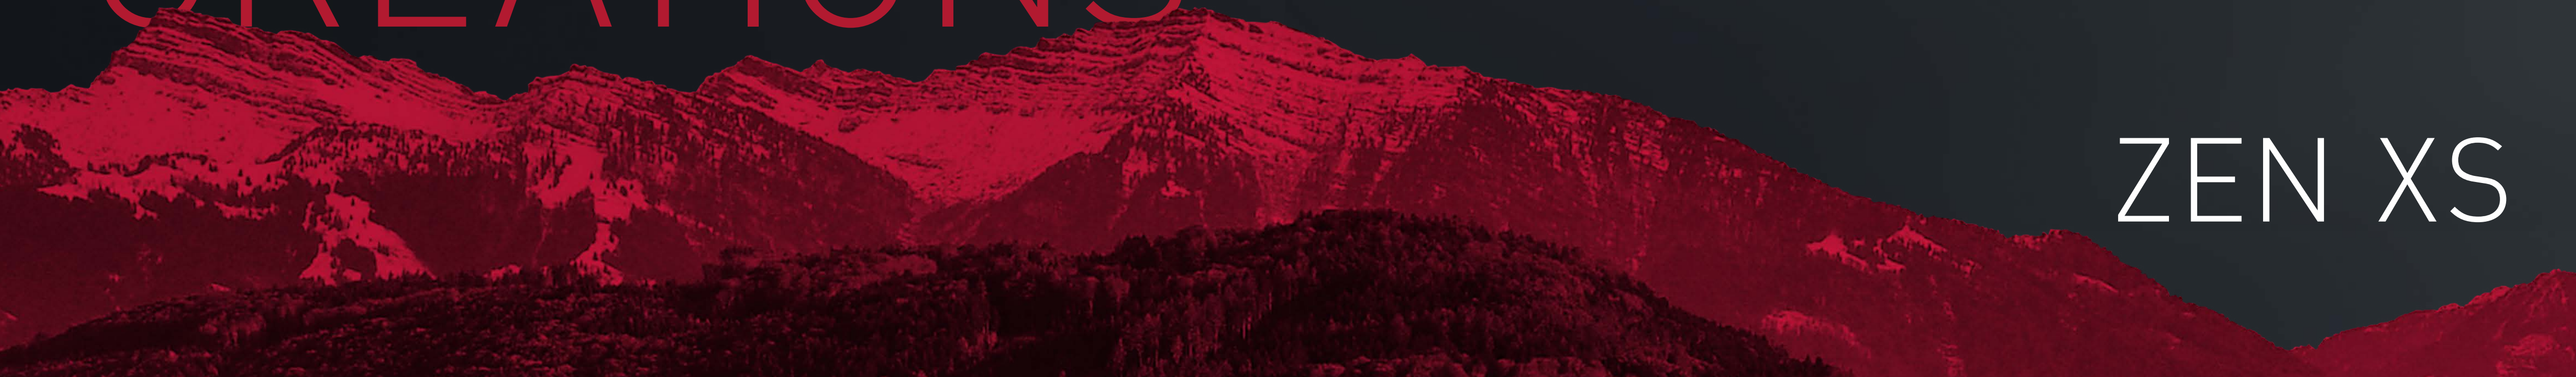

LED LIGHT BAND ZEN XS

OVERVIEW

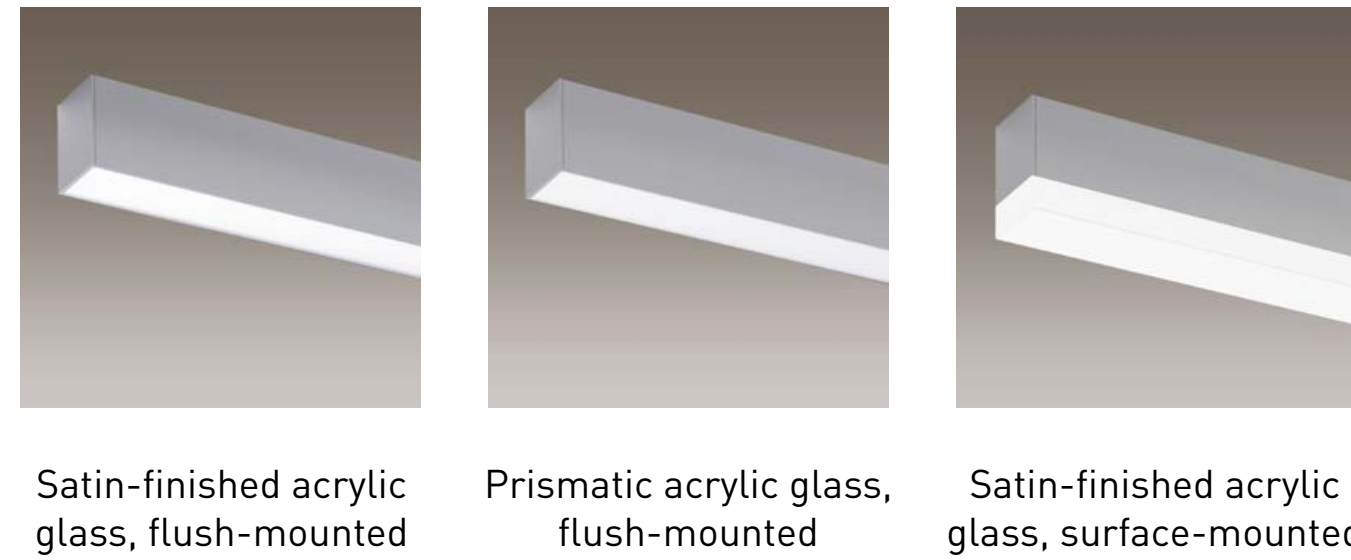

Cover	Satin-finished acrylic glass, flush-mounted	Prismatic acrylic glass, flush-mounted	Satin-finished acrylic glass, surface-mounted
Light colour			
3,000 K / CRI > 80	•	•	•
4,000 K / CRI > 80	•	•	•
Unified Glare Rating			
UGR < 22		•	
UGR < 25	•		•
Light output			
Medium	•	•	•
Option			
DALI-2	•	•	•
Emergency operation ¹	•	•	•
DALI-2 and emergency operation ¹	•	•	•

¹With single battery supply 1 h, possible from a minimum length of 1135 mm.

Further technical specifications:

- Luminous flux effective: up to 1738 lm/m
- System efficiency: up to 142 lm/W
- Shock resistance: IK06 (satin-finished cover) / IK07 (prismatic cover)

OPTIONALLY ON REQUEST

- Colour temperature: 2,700 K, 6,500 K and Tunable White 2,700–6,500 K
- Colour rendering: CRI > 90
- Higher luminous flux
- Integrated sensors
- RAL/NCS paint finishes



REFLECTOR LUMINAIRE ON REQUEST

Made up of a multicellular reflector.
With universal mounting springs for ZEN XS profile.

- Colour temperature: 3,000 K, 4,000 K and Tunable White 2,700–6,500 K
- Colour rendering: CRI > 80 und > 90
- Reflector: black, white, metallic – each matt or high gloss
- Beam pattern: wide, medium, narrow or asymmetrical



← Scan the QR code now and discover all the highlights of the product family ZEN XS online!

ZEN XS – five convincing reasons.

1. Homogeneous illumination
2. High efficiency
3. Simple design
4. Wide range of applications
5. Efficient installation



↖ TRIBÜNE
↖ SEMINARRAUM
← SPORTHALLEN
← GARDEROBEN 1-6



TULUX AG
TÖDISTRASSE 4
CH-8856 TUGGEN
T +41 55 465 60 00
F +41 55 465 60 01
INFO@TULUX.CH

WWW.TULUX.CH



SLG 
member