



RECESSED LED LUMINAIRE PIXEL

Technical data sheet

8.7W LED, 849 Lumen, 98 Lumen/Watt, 3000 Kelvin. CRI>90, UGR<22/<25/<25, IP43. Without ballast. With universal fixing brackets for suspended ceilings and casting drums. Grinded aluminium. Satined acrylic glass, with 0.4 m of cable connection, connection terminal included.

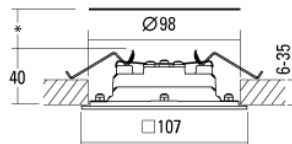

- * Im Hohlraum von abgehängten Decken muss ein Abstand von 20 mm zwischen Leuchte und brennbaren Teilen eingehalten werden.
- * Dans les plafonds suspendus, il faut observer une distance de 20 mm entre le luminaire et la matière combustible.

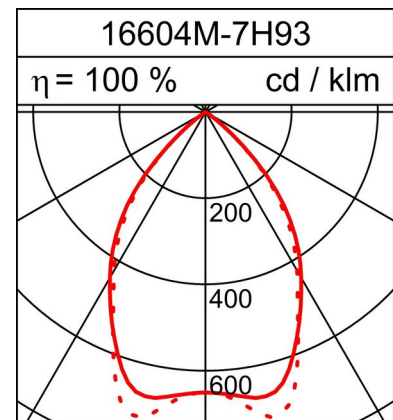

PRODUCT DATA

Item number	16604M-7H93
Light source	LED LED LED
Equipping / Current feed	500 700 900 mA
System output	6.1 8.7 11.3 W

LIGHT DATA

Optical light output ratio	100 100 100 %
Light direct/non direct ratio	100 / 0 %
Absolute luminous flux (Basis: Light source 840)	628 849 1031 lm
Luminaire light output (lm/W)	103 98 92 lm/W

UNIFIED GLARE RATING UGR

X=4H, Y=8H, S=0,25H

Deg. of reflection 70/50/20

Perpendicular Zero	22.1 23.1 23.8
Perpendicular Ninty	21.9 22.9 23.6

Subject to technical modifications. 26.02.2024