
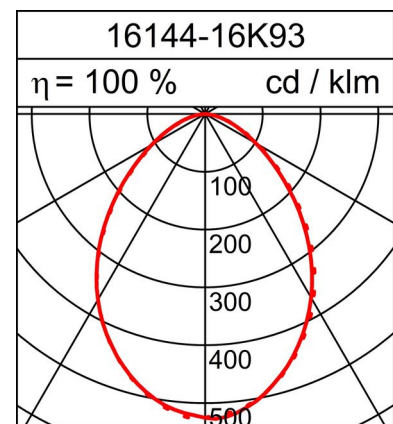


RECESSED LUMINAIRE UNO

Technical data sheet

18.4W LED, 1930 Lumen, 105 Lumen/Watt, 3000 Kelvin. $\varnothing=174\text{mm}$, ceiling-side IP20 and room-side IP64, CRI>90. White. Cover made of white acrylic glass. With universal fixing brackets and electronic control gear. Beam angle 80°.

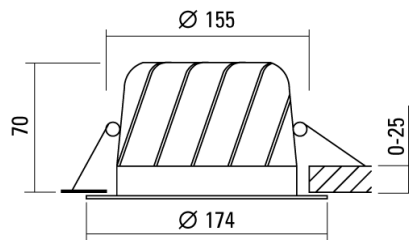

PRODUCT DATA

Item number	16144-16K93
Dimensions	$\varnothing=174\text{ mm}$
Light source	LED
Equipping / Current feed	16.6 W
System output	18.4 W

LIGHT DATA

Optical light output ratio	100 %
Light direct/non direct ratio	100 / 0 %
Absolute luminous flux (Basis: Light source 840)	1930 lm
Luminaire light output (lm/W)	105 lm/W

UNIFIED GLARE RATING UGR

X=4H, Y=8H, S=0,25H	
Deg. of reflection 70/50/20	
Perpendicular Zero	25.5
Perpendicular Ninty	25.7

Subject to technical modifications. 09.04.2021