
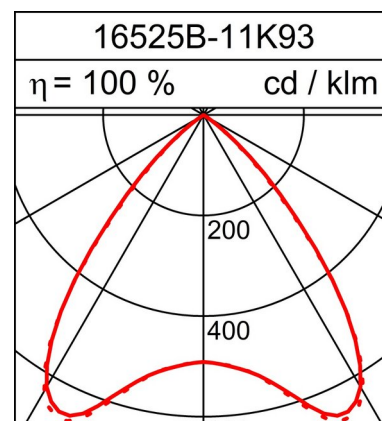


# RECESSED DOWNLIGHT EQUIP

## Technical data sheet

13.6W LED, 1381 Lumen, 102 Lumen/Watt, 3000 Kelvin. H=90mm, CRI>90, UGR<22, ceiling-side IP40 and room-side IP55. Wide-angled beam. White anti-glare reflector made of die-cast aluminium. High reflecting, anodized and silver coated segment reflector. With highly transparent anti-glare closing glass. With universal fixing brackets. With electronic ballast.

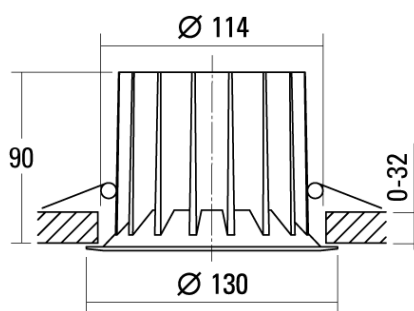

### PRODUCT DATA

|                          |              |
|--------------------------|--------------|
| Item number              | 16525B-11K93 |
| Dimensions               | H=90 mm      |
| Light source             | LED          |
| Equipping / Current feed | 11.6 W       |
| System output            | 13.6 W       |

### LIGHT DATA

|                                                  |           |
|--------------------------------------------------|-----------|
| Optical light output ratio                       | 100 %     |
| Light direct/non direct ratio                    | 100 / 0 % |
| Absolute luminous flux (Basis: Light source 840) | 1381 lm   |
| Luminaire light output (lm/W)                    | 102 lm/W  |

### UNIFIED GLARE RATING UGR

X=4H, Y=8H, S=0,25H

Deg. of reflection 70/50/20

|                     |      |
|---------------------|------|
| Perpendicular Zero  | 21.3 |
| Perpendicular Ninty | 21.1 |

Subject to technical modifications. 08.08.2024