
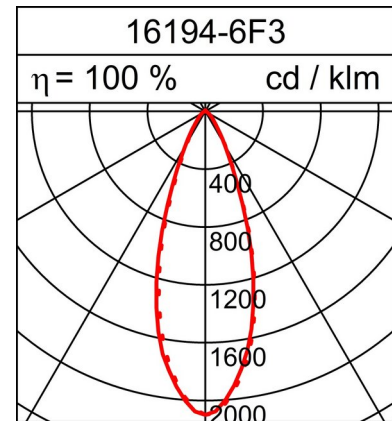


RECESSED LUMINAIRE MINI

Technical data sheet

6.2W LED, 632 Lumen, 102 Lumen/Watt, 3000 Kelvin. H=102mm, \varnothing =101mm, CRI>90, UGR<19/<19, IP20. Cast aluminium, white. Reflector with touch protection, lighting angle 36°. Luminaire set back into ceiling with mains cable. With universal fixing brackets. Without electronic ballast.

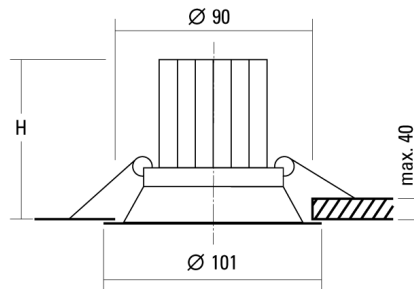

PRODUCT DATA

Item number	16194-6F3
Dimensions	H=102 mm / \varnothing =101 mm
Light source	LED LED
Equipping / Current feed	180 250 mA
System output	6.2 8.8 W

LIGHT DATA

Optical light output ratio	100 100 %
Light direct/non direct ratio	98.89 / 1.11 %
Absolute luminous flux (Basis: Light source 840)	632 837 lm
Luminaire light output (lm/W)	102 96 lm/W

UNIFIED GLARE RATING UGR

X=4H, Y=8H, S=0,25H

Deg. of reflection 70/50/20

Perpendicular Zero	17.6 18.6
Perpendicular Ninty	17.3 18.2

Subject to technical modifications. 28.03.2024