
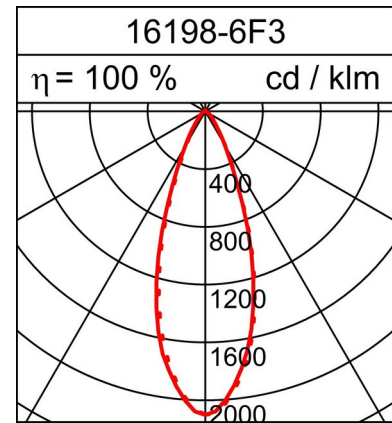


RECESSED LUMINAIRE MINI

Technical data sheet

6.2W LED, 632 Lumen, 102 Lumen/Watt, 3000 Kelvin. H=105mm, \varnothing =101mm, CRI>90, UGR<19/<19, IP20. Cast aluminium, white. Reflector with touch protection, lighting angle 36°. $\pm 25^\circ$ pivotable. With mains cable and universal fixing brackets. Without electronic ballast.

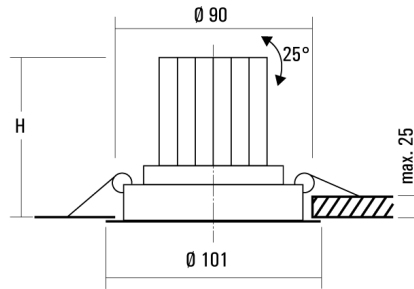

PRODUCT DATA

Item number	16198-6F3
Dimensions	H=105 mm / \varnothing =101 mm
Light source	LED LED
Equipping / Current feed	180 250 mA
System output	6.2 8.8 W

LIGHT DATA

Optical light output ratio	100 100 %
Light direct/non direct ratio	98.89 / 1.11 %
Absolute luminous flux (Basis: Light source 840)	632 837 lm
Luminaire light output (lm/W)	102 96 lm/W

UNIFIED GLARE RATING UGR

X=4H, Y=8H, S=0,25H	
Deg. of reflection 70/50/20	
Perpendicular Zero	17.6 18.6
Perpendicular Ninty	17.3 18.2

Subject to technical modifications. 26.02.2024