
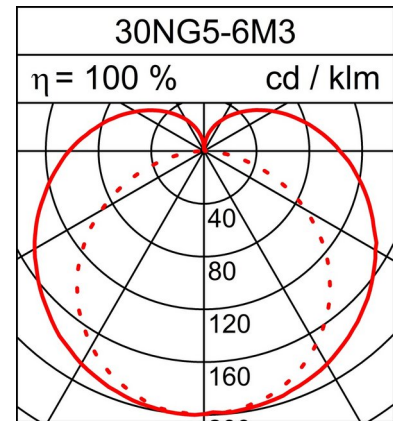


WALL-MOUNTED LUMINAIRE LEAN

Technical data sheet

7.1W LED, 708 Lumen, 100 Lumen/Watt, 3000 Kelvin. W=100mm, H=320mm, Ø=80mm, CRI>90, UGR<19, IP50. Tube made of diffuse satinated acrylic glass. Wall console and front sides nickel silver pearl matt. Light output low. With electronic ballast.

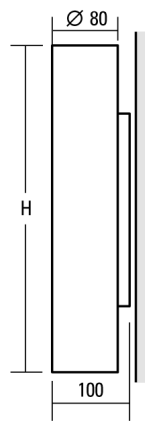

PRODUCT DATA

Item number	30NG5-6M3
Dimensions	B=100 mm / H=320 mm / Ø=80 mm
Light source	LED
Equipping / Current feed	5.5 W
System output	7.1 W
Assembly distance	180 mm
Weight	1.7 kg

LIGHT DATA

Optical light output ratio	100 %
Light direct/non direct ratio	78 / 22 %
Absolute luminous flux (Basis: Light source 840)	708 lm
Luminaire light output (lm/W)	100 lm/W

UNIFIED GLARE RATING UGR

X=4H, Y=8H, S=0,25H	
Deg. of reflection 70/50/20	
Perpendicular Zero	21.5
Perpendicular Ninty	19.0

Subject to technical modifications. 26.02.2024