
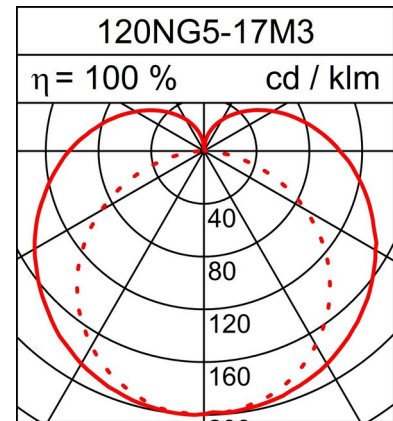



CEILING-MOUNTED LUMINAIRE LEAN

Technical data sheet

20.4W LED, 2283 Lumen, 112 Lumen/Watt, 3000 Kelvin. L=1190mm, H=100mm, Ø=80mm, CRI>90, UGR<19, IP50. Tube made of diffuse satinated acrylic glass. Ceiling console and front sides nickel silver pearl matt. Light output low. With electronic ballast.

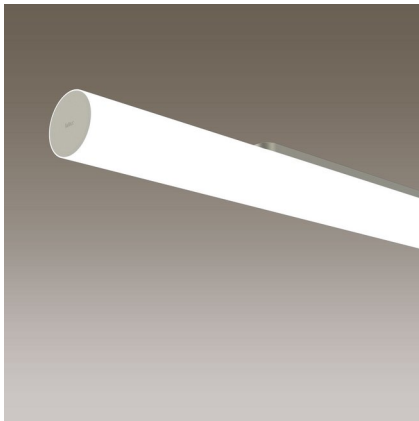

PRODUCT DATA

| | |
|--------------------------|--------------------------------|
| Item number | 120NG5-17M3 |
| Dimensions | L=1190 mm / H=100 mm / Ø=80 mm |
| Light source | LED |
| Equipping / Current feed | 17.4 W |
| System output | 20.4 W |
| Assembly distance | 760 mm |
| Weight | 4.4 kg |

LIGHT DATA

| | |
|--|-----------|
| Optical light output ratio | 100 % |
| Light direct/non direct ratio | 78 / 22 % |
| Absolute luminous flux (Basis: Light source 840) | 2283 lm |
| Luminaire light output (lm/W) | 112 lm/W |

UNIFIED GLARE RATING UGR

| | |
|-----------------------------|------|
| X=4H, Y=8H, S=0,25H | |
| Deg. of reflection 70/50/20 | |
| Perpendicular Zero | 21.0 |
| Perpendicular Ninty | 18.5 |

Subject to technical modifications. 08.08.2024