
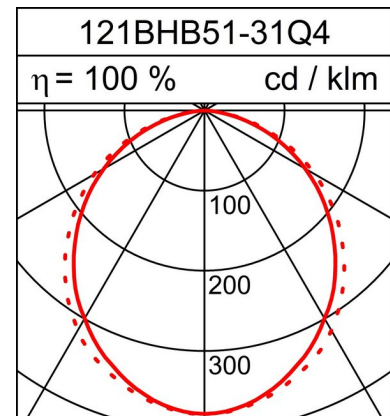


COMMERCIAL AND INDUSTRIAL LUMINAIRE PLANK

Technical data sheet

34.7W LED, 4986 Lumen, 144 Lumen/Watt, 4000 Kelvin. L=1214mm, W=133mm, H=48mm, CRI>80, UGR<25, IP20. System luminaire. Suitable for ambient temperatures of -10°C up to +45°C. Luminaire housing made of industrial grey aluminum. Frame made of chrome steel. With acrylic diffuser satiné diffuse. With B3 plug for TURBO rail.

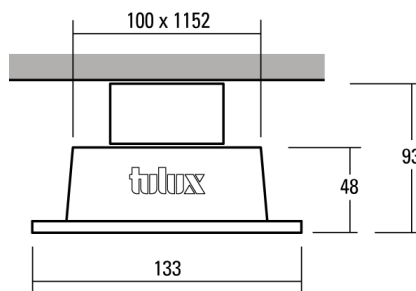

PRODUCT DATA

Item number	121BHB51-31Q4
Dimensions	L=1214 mm / B=133 mm / H=48 mm
Light source	LED
Equipping / Current feed	31.6 W
System output	34.7 W
Weight	4.6 kg

LIGHT DATA

Optical light output ratio	100 %
Light direct/non direct ratio	100 / 0 %
Absolute luminous flux (Basis: Light source 840)	4986 lm
Luminaire light output (lm/W)	144 lm/W

UNIFIED GLARE RATING UGR

X=4H, Y=8H, S=0,25H	
Deg. of reflection 70/50/20	
Perpendicular Zero	24.5
Perpendicular Ninty	24.9

Subject to technical modifications. 26.02.2024