
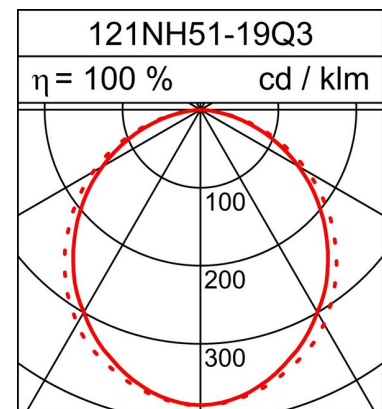


COMMERCIAL AND INDUSTRIAL LUMINAIRE PLANK

Technical data sheet

22.2W LED, 3018 Lumen, 136 Lumen/Watt, 3000 Kelvin. L=1214mm, CRI>80, UGR<25, IP66. Ceiling or wall mounted luminaire. Suitable for ambient temperatures of -20°C up to +45°C. Luminaire housing made of industrial grey aluminum. Click adapter and frame made of chrome steel. With acrylic diffuser satiné diffuse. Quick and easy installation with a unique snap connection.



PRODUCT DATA

Item number	121NH51-19Q3
Dimensions	L=1214 mm
Light source	LED
Equipping / Current feed	19.8 W
System output	22.2 W

LIGHT DATA

Optical light output ratio	100 %
Light direct/non direct ratio	100 / 0 %
Absolute luminous flux (Basis: Light source 840)	3018 lm
Luminaire light output (lm/W)	136 lm/W

UNIFIED GLARE RATING UGR

X=4H, Y=8H, S=0,25H	
Deg. of reflection 70/50/20	
Perpendicular Zero	22.8
Perpendicular Ninety	23.1

Subject to technical modifications. 08.08.2024