
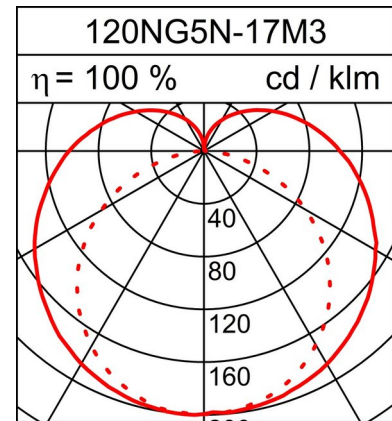


CEILING MOUNTED LUMINAIRE LEAN

Technical data sheet

20.4W LED, 2283 Lumen, 112 Lumen/Watt, 3000 Kelvin. L=1190mm, H=100mm, \varnothing =80mm, CRI>90, UGR<19, IP54. Tube made of diffuse satinated acrylic glass. Ceiling console and front sides nickel silver pearl matt. Light output intermediate. With electronic ballast.

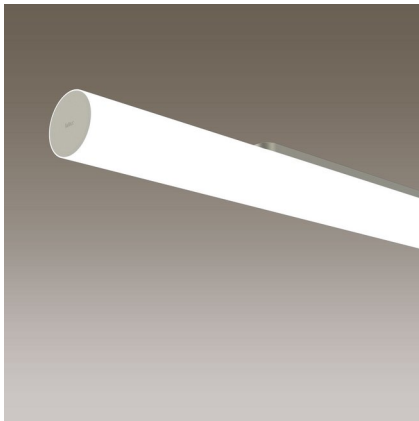

PRODUCT DATA

Item number	120NG5N-17M3
Dimensions	L=1190 mm / H=100 mm / \varnothing =80 mm
Light source	LED
Equipping / Current feed	17.4 W
System output	20.4 W
Weight	4.4 kg

LIGHT DATA

Optical light output ratio	100 %
Light direct/non direct ratio	78 / 22 %
Absolute luminous flux (Basis: Light source 840)	2283 lm
Luminaire light output (lm/W)	112 lm/W

UNIFIED GLARE RATING UGR

X=4H, Y=8H, S=0,25H	
Deg. of reflection 70/50/20	
Perpendicular Zero	21.0
Perpendicular Ninty	18.5

Subject to technical modifications. 26.02.2024