
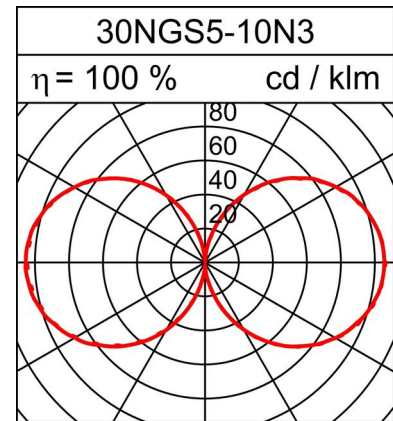


PENDANT LUMINAIRE LEAN

Technical data sheet

9.5W LED, 1145 Lumen, 121 Lumen/Watt, 3000 Kelvin. H=350mm, \varnothing =100mm, CRI>90, UGR<22, IP50. Vertical pendant luminaire. Tube made of diffuse satinated acrylic glass. Front sides made of nickel silver pearl matt. Steelcable suspension max. 980mm, adjustable in height. Light output low. With electronic ballast. With DALI control.

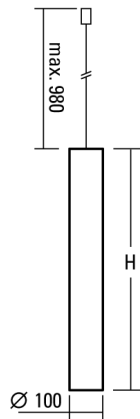

PRODUCT DATA

Item number	30NGS5-10ND3
Dimensions	H=350 mm / \varnothing =100 mm
Light source	LED
Equipping / Current feed	7.8 W
System output	9.5 W
Weight	1.7 kg

LIGHT DATA

Optical light output ratio	100 %
Light direct/non direct ratio	50 / 50 %
Absolute luminous flux (Basis: Light source 840)	1145 lm
Luminaire light output (lm/W)	121 lm/W

UNIFIED GLARE RATING UGR

X=4H, Y=8H, S=0,25H	
Deg. of reflection 70/50/20	
Perpendicular Zero	20.2
Perpendicular Ninty	20.2

Subject to technical modifications. 11.06.2022