
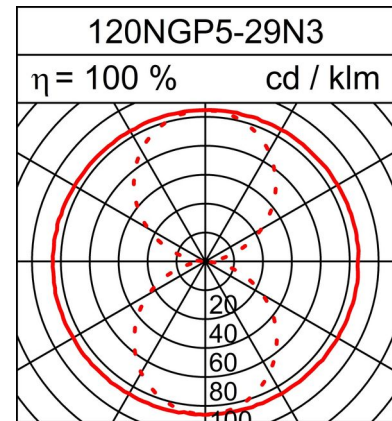


# PENDANT LUMINAIRE LEAN

## Technical data sheet

28.6W LED, 3706 Lumen, 130 Lumen/Watt, 3000 Kelvin. L=1190mm, Ø=100mm, CRI>90, UGR<16, IP50. Horizontal pendant luminaire. Tube made of diffuse satinated acrylic glass. Front sides made of nickel silver pearl matt. Steelcable suspension max. 980mm, adjustable in height. Light output low. With electronic ballast. With DALI control.

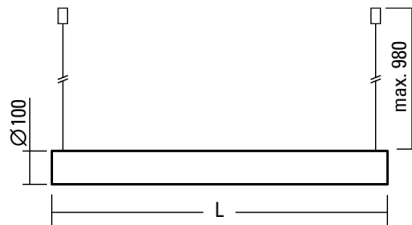

### PRODUCT DATA

Item number	120NGP5-29ND3
Dimensions	L=1190 mm / Ø=100 mm
Light source	LED
Equipping / Current feed	25.1 W
System output	28.6 W
Assembly distance	1140 mm
Weight	4.4 kg

### LIGHT DATA

Optical light output ratio	100 %
Light direct/non direct ratio	50 / 50 %
Absolute luminous flux (Basis: Light source 840)	3706 lm
Luminaire light output (lm/W)	130 lm/W

### UNIFIED GLARE RATING UGR

X=4H, Y=8H, S=0,25H	
Deg. of reflection 70/50/20	
Perpendicular Zero	19.7
Perpendicular Ninty	14.8

Subject to technical modifications. 11.06.2022