
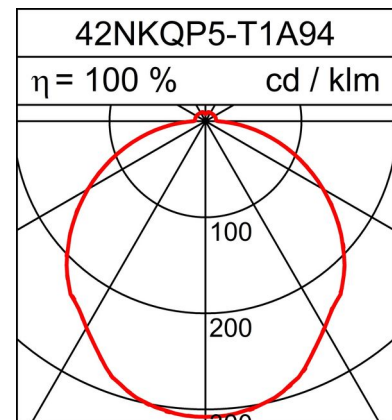


PENDANT LUMINAIRE AREA

Technical data sheet

20.8W LED, 2930 Lumen, 141 Lumen/Watt, 4000 Kelvin. L=420mm, W=420mm, H=59mm, ceiling-side IP40 and room-side IP50, CRI>90. Opal cover made of acrylic glass. Low light output. With electronic ballast and integrated emergency lighting. With DALI control. Steel cable suspension 1 m, adjustable in height. 1.15 m of white connection cable included.

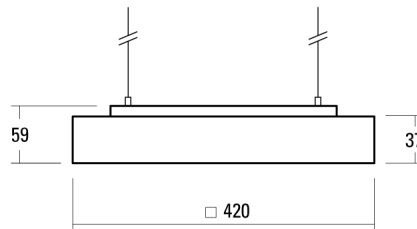

PRODUCT DATA

Item number	42NKQP5-T1ADN94
Dimensions	L=420 mm / B=420 mm / H=59 mm
Light source	LED
Equipping / Current feed	18.8 W
System output	20.8 W
Assembly distance	250 x 250 mm
Weight	4.2 kg

LIGHT DATA

Optical light output ratio	100 %
Light direct/non direct ratio	93 / 7 %
Absolute luminous flux (Basis: Light source 840)	2930 lm
Luminaire light output (lm/W)	141 lm/W

UNIFIED GLARE RATING UGR

X=4H, Y=8H, S=0,25H	
Deg. of reflection 70/50/20	
Perpendicular Zero	21.4
Perpendicular Ninty	21.4

Subject to technical modifications. 14.10.2021