
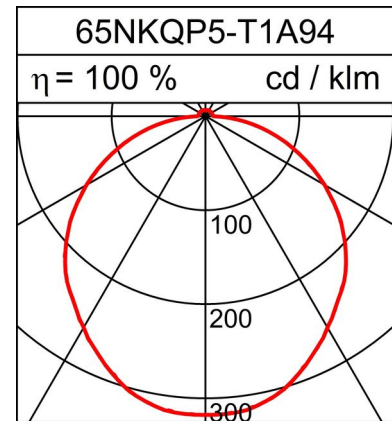


PENDANT LUMINAIRE AREA

Technical data sheet

41W LED, 5879 Lumen, 144 Lumen/Watt, 4000 Kelvin. L=650mm, W=650mm, H=59mm, CRI>90, UGR<22, IP40. IP50 in the lamp housing. Opal cover made of acrylic glass. Low light output. With electronic ballast and integrated emergency lighting. With DALI control. Steel cable suspension 1 m, adjustable in height. 1.15 m of white connection cable included.

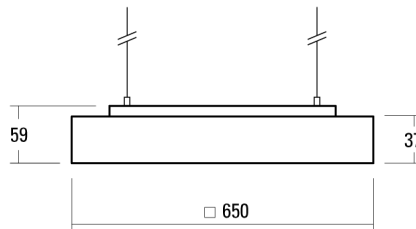

PRODUCT DATA

Item number	65NKQP5-T1ADN94
Dimensions	L=650 mm / B=650 mm / H=59 mm
Light source	LED
Equipping / Current feed	37.3 W
System output	41 W
Assembly distance	450 x 450 mm
Weight	8.1 kg

LIGHT DATA

Optical light output ratio	100 %
Light direct/non direct ratio	95 / 5 %
Absolute luminous flux (Basis: Light source 840)	5879 lm
Luminaire light output (lm/W)	144 lm/W

UNIFIED GLARE RATING UGR

X=4H, Y=8H, S=0,25H	
Deg. of reflection 70/50/20	
Perpendicular Zero	21.3
Perpendicular Ninty	21.3

Subject to technical modifications. 16.05.2022