
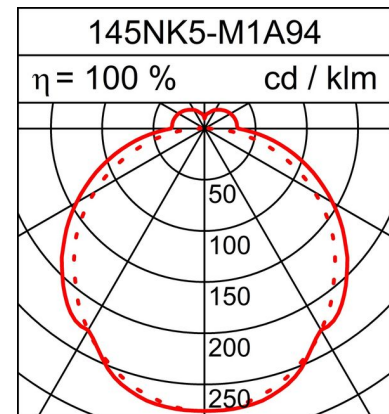


SURFACE-MOUNTED LUMINAIRE AREA

Technical data sheet

44.1W LED, 6325 Lumen, 144 Lumen/Watt, 4000 Kelvin. L=1457mm, W=140mm, H=59mm, CRI>90, UGR<25, IP40. IP50 in the lamp housing. For ceiling or wall mounting. Opal cover made of acrylic glass. Regular light output. With electronic ballast and integrated emergency lighting. With DALI control.

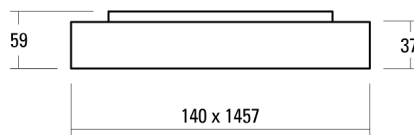

PRODUCT DATA

Item number	145NK5-M1ADN94
Dimensions	L=1457 mm / B=140 mm / H=59 mm
Light source	LED
Equipping / Current feed	40.8 W
System output	44.1 W
Assembly distance	1000 mm
Weight	5.3 kg

LIGHT DATA

Optical light output ratio	100 %
Light direct/non direct ratio	88 / 12 %
Absolute luminous flux (Basis: Light source 840)	6325 lm
Luminaire light output (lm/W)	144 lm/W

UNIFIED GLARE RATING UGR

X=4H, Y=8H, S=0,25H	
Deg. of reflection 70/50/20	
Perpendicular Zero	23.0
Perpendicular Ninty	22.7

Subject to technical modifications. 16.05.2022