
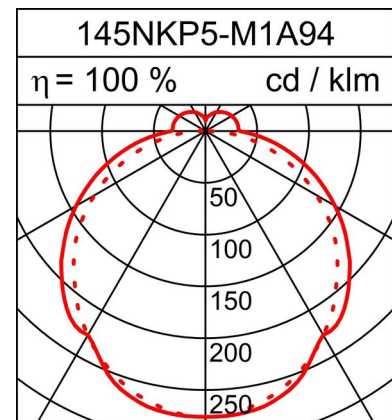


# PENDANT LUMINAIRE AREA

## Technical data sheet

44.1W LED, 6325 Lumen, 144 Lumen/Watt, 4000 Kelvin. L=1457mm, W=140mm, H=59mm, ceiling-side IP40 and room-side IP50, CRI>90. Opal cover made of acrylic glass. Regular light output. With electronic ballast and integrated emergency lighting. With DALI control. Steel cable suspension 1 m, adjustable in height. 1.15 m of white connection cable included.

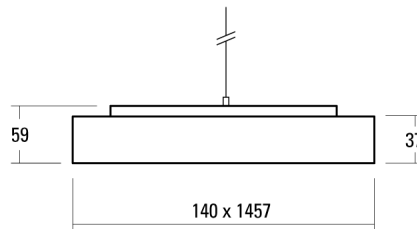

### PRODUCT DATA

Item number	145NKP5-M1ADN94
Dimensions	L=1457 mm / B=140 mm / H=59 mm
Light source	LED
Equipping / Current feed	40.8 W
System output	44.1 W
Assembly distance	1000 mm
Weight	5.5 kg

### LIGHT DATA

Optical light output ratio	100 %
Light direct/non direct ratio	88 / 12 %
Absolute luminous flux (Basis: Light source 840)	6325 lm
Luminaire light output (lm/W)	144 lm/W

### UNIFIED GLARE RATING UGR

X=4H, Y=8H, S=0,25H	
Deg. of reflection 70/50/20	
Perpendicular Zero	23.0
Perpendicular Ninty	22.7

Subject to technical modifications. 14.10.2021