

LIGHT

tulux



SWISS LIGHT CREATIONS




AREA

prismatic / prismatic PRO

SUPERLATIVE VISUAL COMFORT

THE PRISMATIC AREA DESIGNS

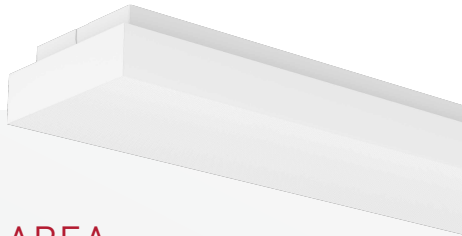


AREA


115 NK4 - * / 145 NK4 - *

Cover	Prismatic acrylic glass, lateral opal finish
Dimensions	140 × 1157 × 59 mm 140 × 1457 × 59 mm
Light output	3500 lm – 6325 lm
UGR	<18.6 – <20.3
CRI	>90

Light distribution



Dimensions

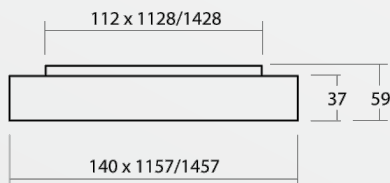



CE IP40 IK05 230 V



AREA PRO

115 NK9 - * / 145 NK9 - *

Cover	PRO ¹ prismatic acrylic glass, lateral opal finish ¹ highly transparent microstructured cone surface
Dimensions	155 × 1157 × 65 mm 155 × 1457 × 65 mm
Light output	4120 lm – 5440 lm
UGR	<18.4
CRI	>90

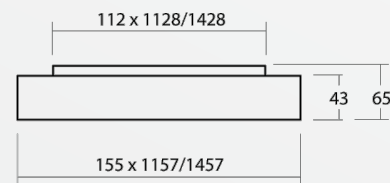

CE IP40 IK05 230 V

APPLICATIONS:

Glare reduction in any setting.

Especially suitable for:

- Offices
- Classrooms
- Lecture halls
- Libraries
- Meeting rooms
- Treatment rooms

HOW YOU BENEFIT – five convincing reasons

1. Versatile combination options
2. Linear design for surface mounting and pendulum mounting
3. Compatible with SET and TURBO rail systems
4. Can be customised on request
5. Developed and manufactured in Switzerland

